



Superior product line

MotionProtect S Plus

Jeweller

Wireless indoor IR motion detector with additional K-band microwave sensor to filter thermal interferences



SSF

NFA2P

2
GRADE
EN 50131

PD 6662
2017

INCERT

What's new


Baseline MotionProtect Plus Jeweller	Superior MotionProtect S Plus Jeweller
SmartBracket mounting panel without screw	SmartBracket mounting panel with screw
Common battery	Enhanced battery
Glossy enclosure	Matte enclosure
Available for all PROs	Available only for accredited partners

This is the device of the **Superior product line**. Superior products is advanced versions of the Jeweller devices. This product line is developed for projects. Only accredited Ajax Systems partners can sell, install, and administer Superior products.


Key features

12m


Detection range of up to 12 m¹



88.5° horizontal and 80° vertical viewing angles




Temperature compensation




Thermal interference filter with K-band microwave sensor




SmartDetect algorithm to prevent false alarms




Effortless installation and replacement




Remote control and configuration in the app



Pairing with a hub via QR code



Up to 5 years of operation with pre-installed Panasonic battery





Pet immunity

An Ajax hub is required for operation. Find the detailed information on the device by the link:

ajax.systems/support/devices/motionprotect-s-plus/




Motion detection range¹ and viewing angles

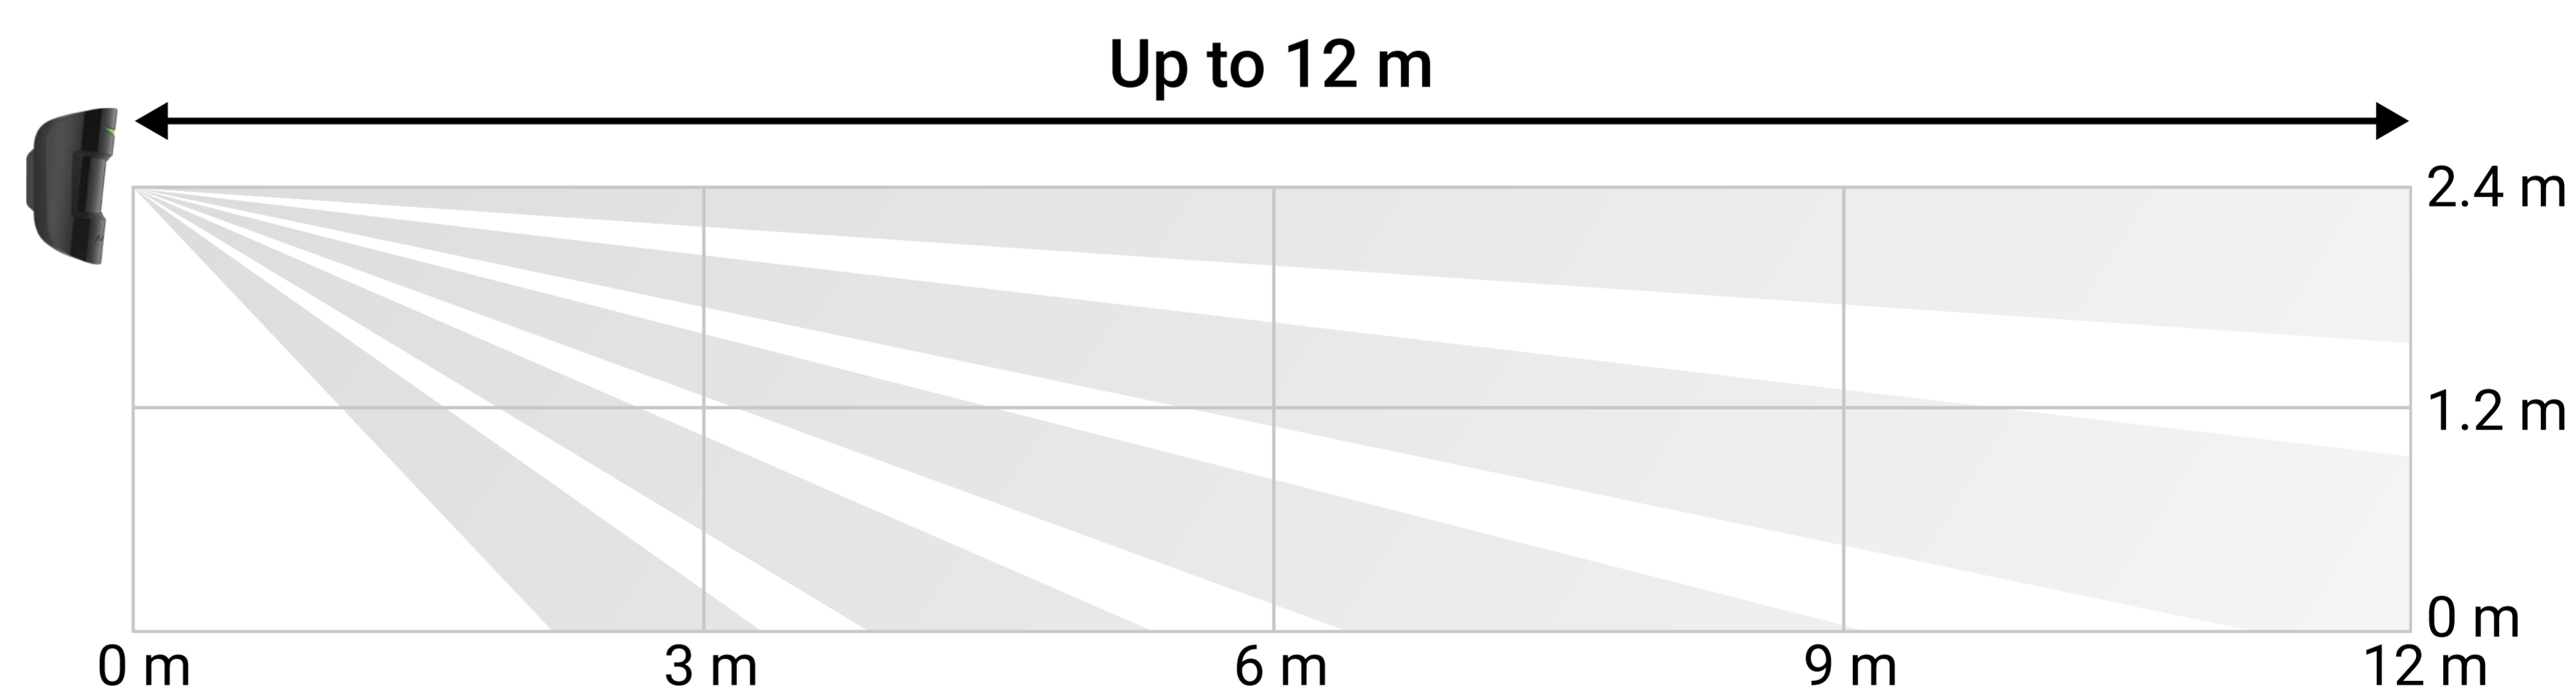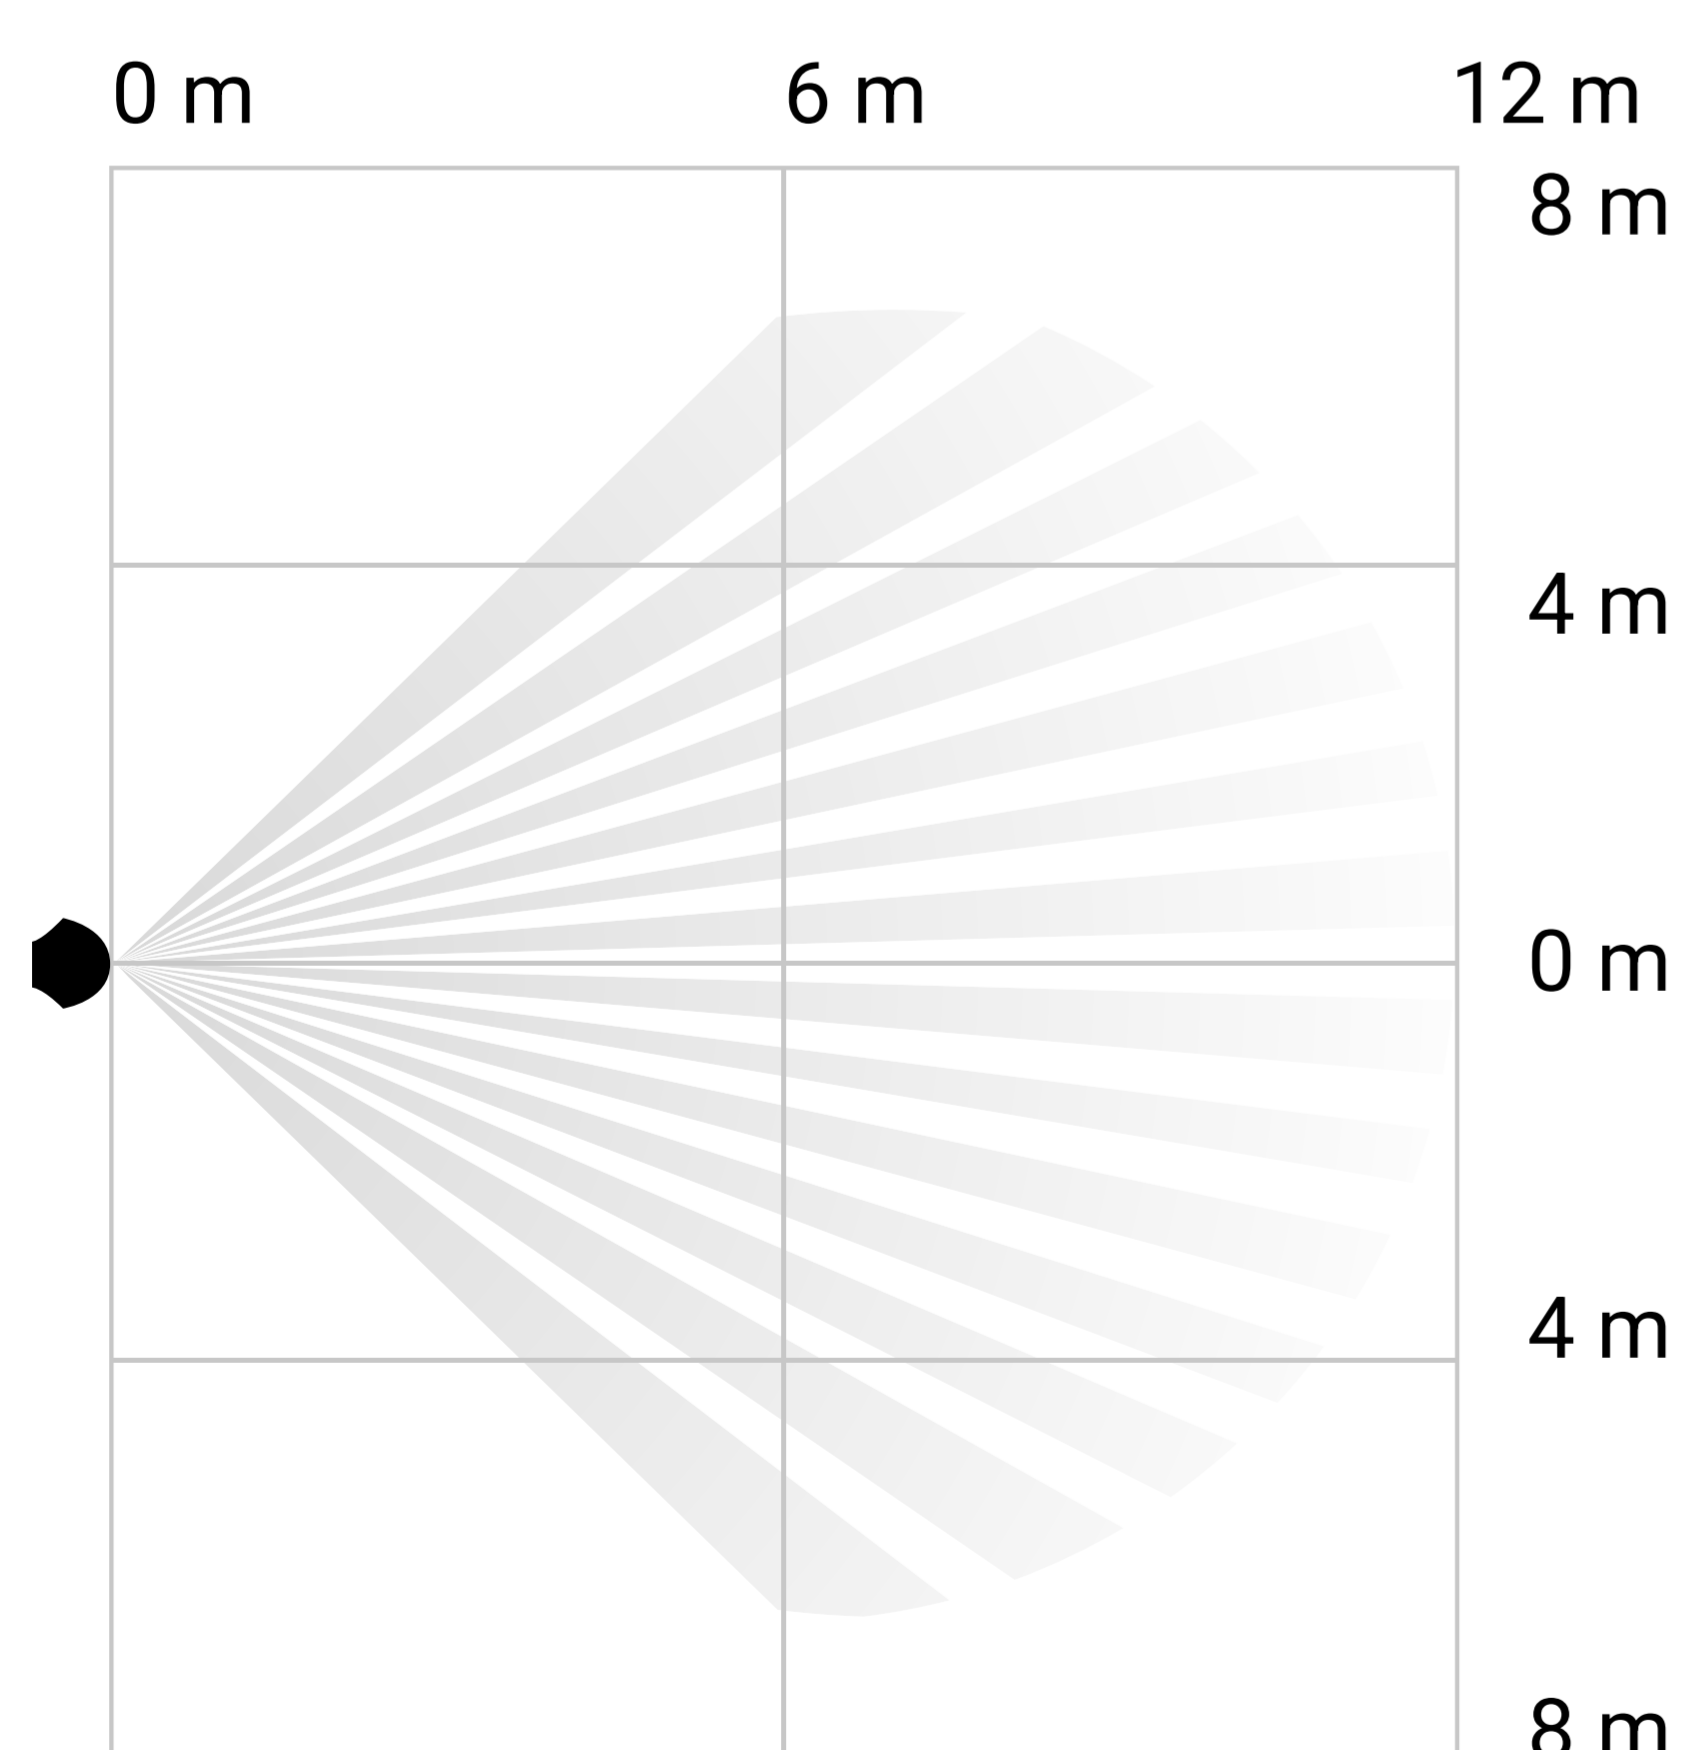

¹ – according to INCERT certification, detection range is up to 8 m

False alarm prevention


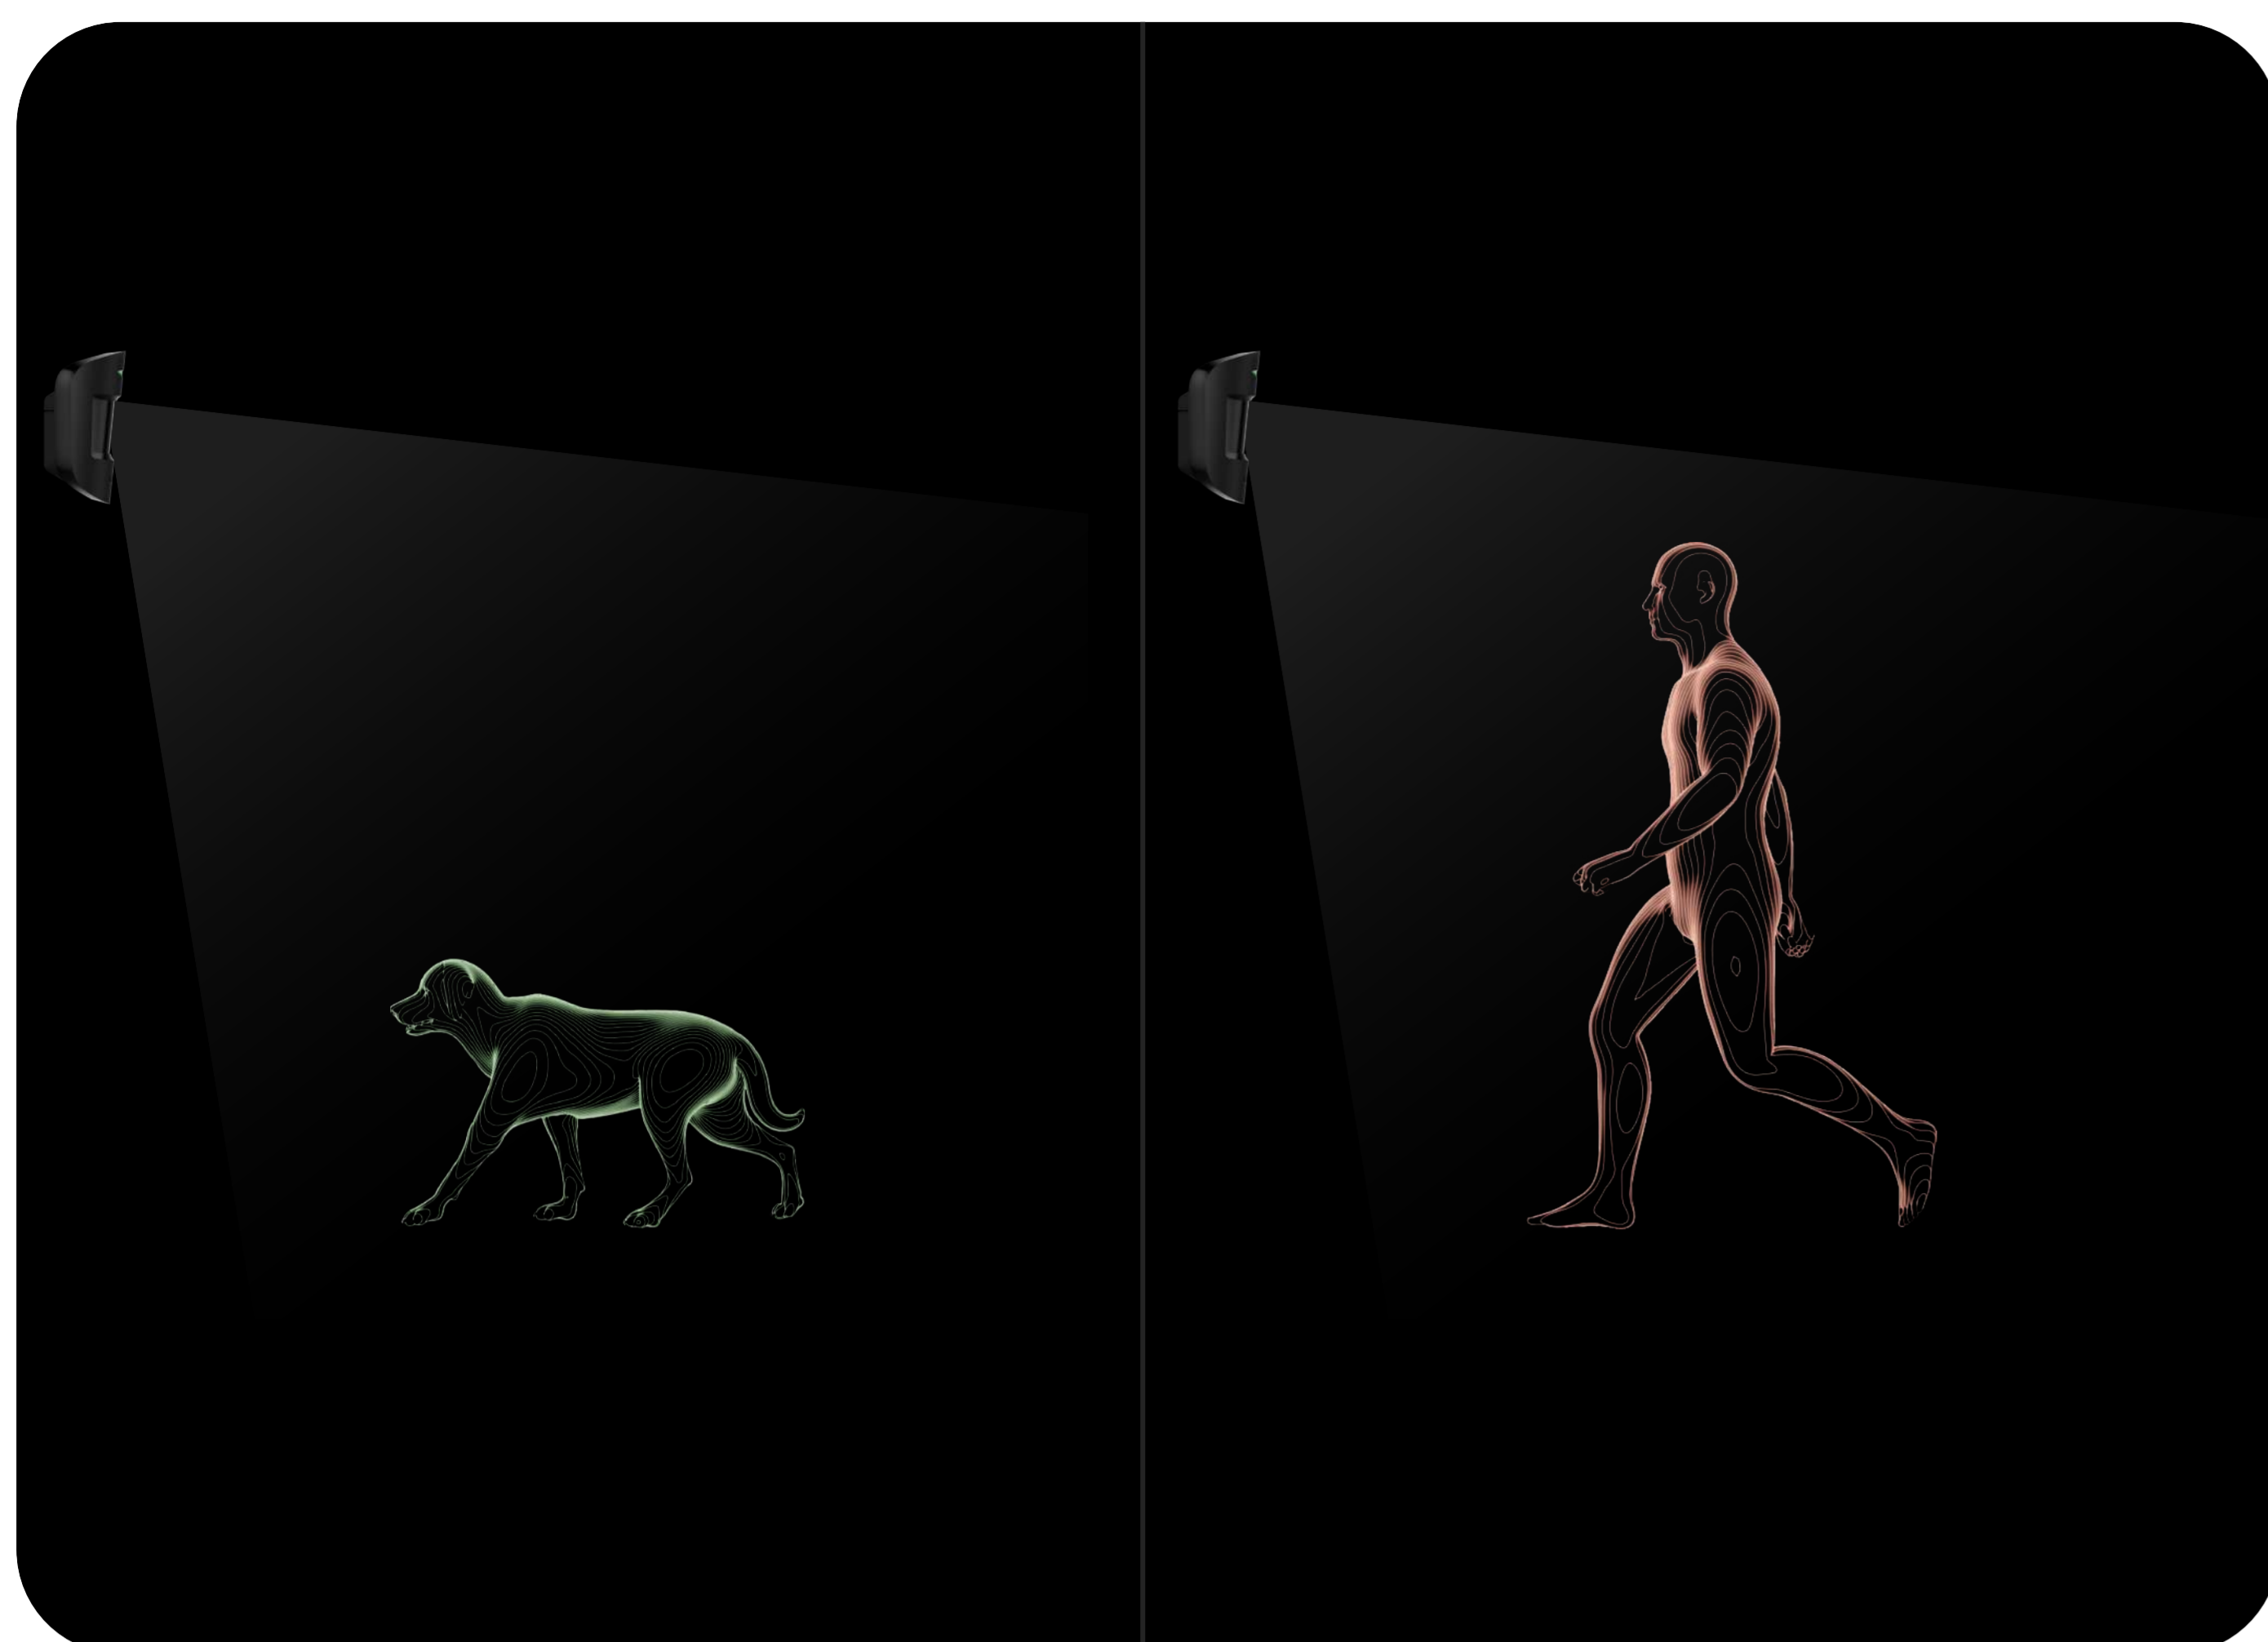


Optics

The detector lens is highly sensitive to human motion, cutting off false alarms caused by other sources of IR radiation. The lens is designed so that potential IR radiation from pets and other interferences affect only the small lens sections. Large sections, on the contrary, are focused on the most likely places of burglar motion.

Hardware

MotionProtect S Plus features an additional K-band microwave sensor. When the device detects motion, it conducts an RF scan of the facility to eliminate false alarms due to thermal interference: air flows, heated by the sun curtains and blinds, fans, fireplaces, air conditioners, and other likely sources of false alarms.

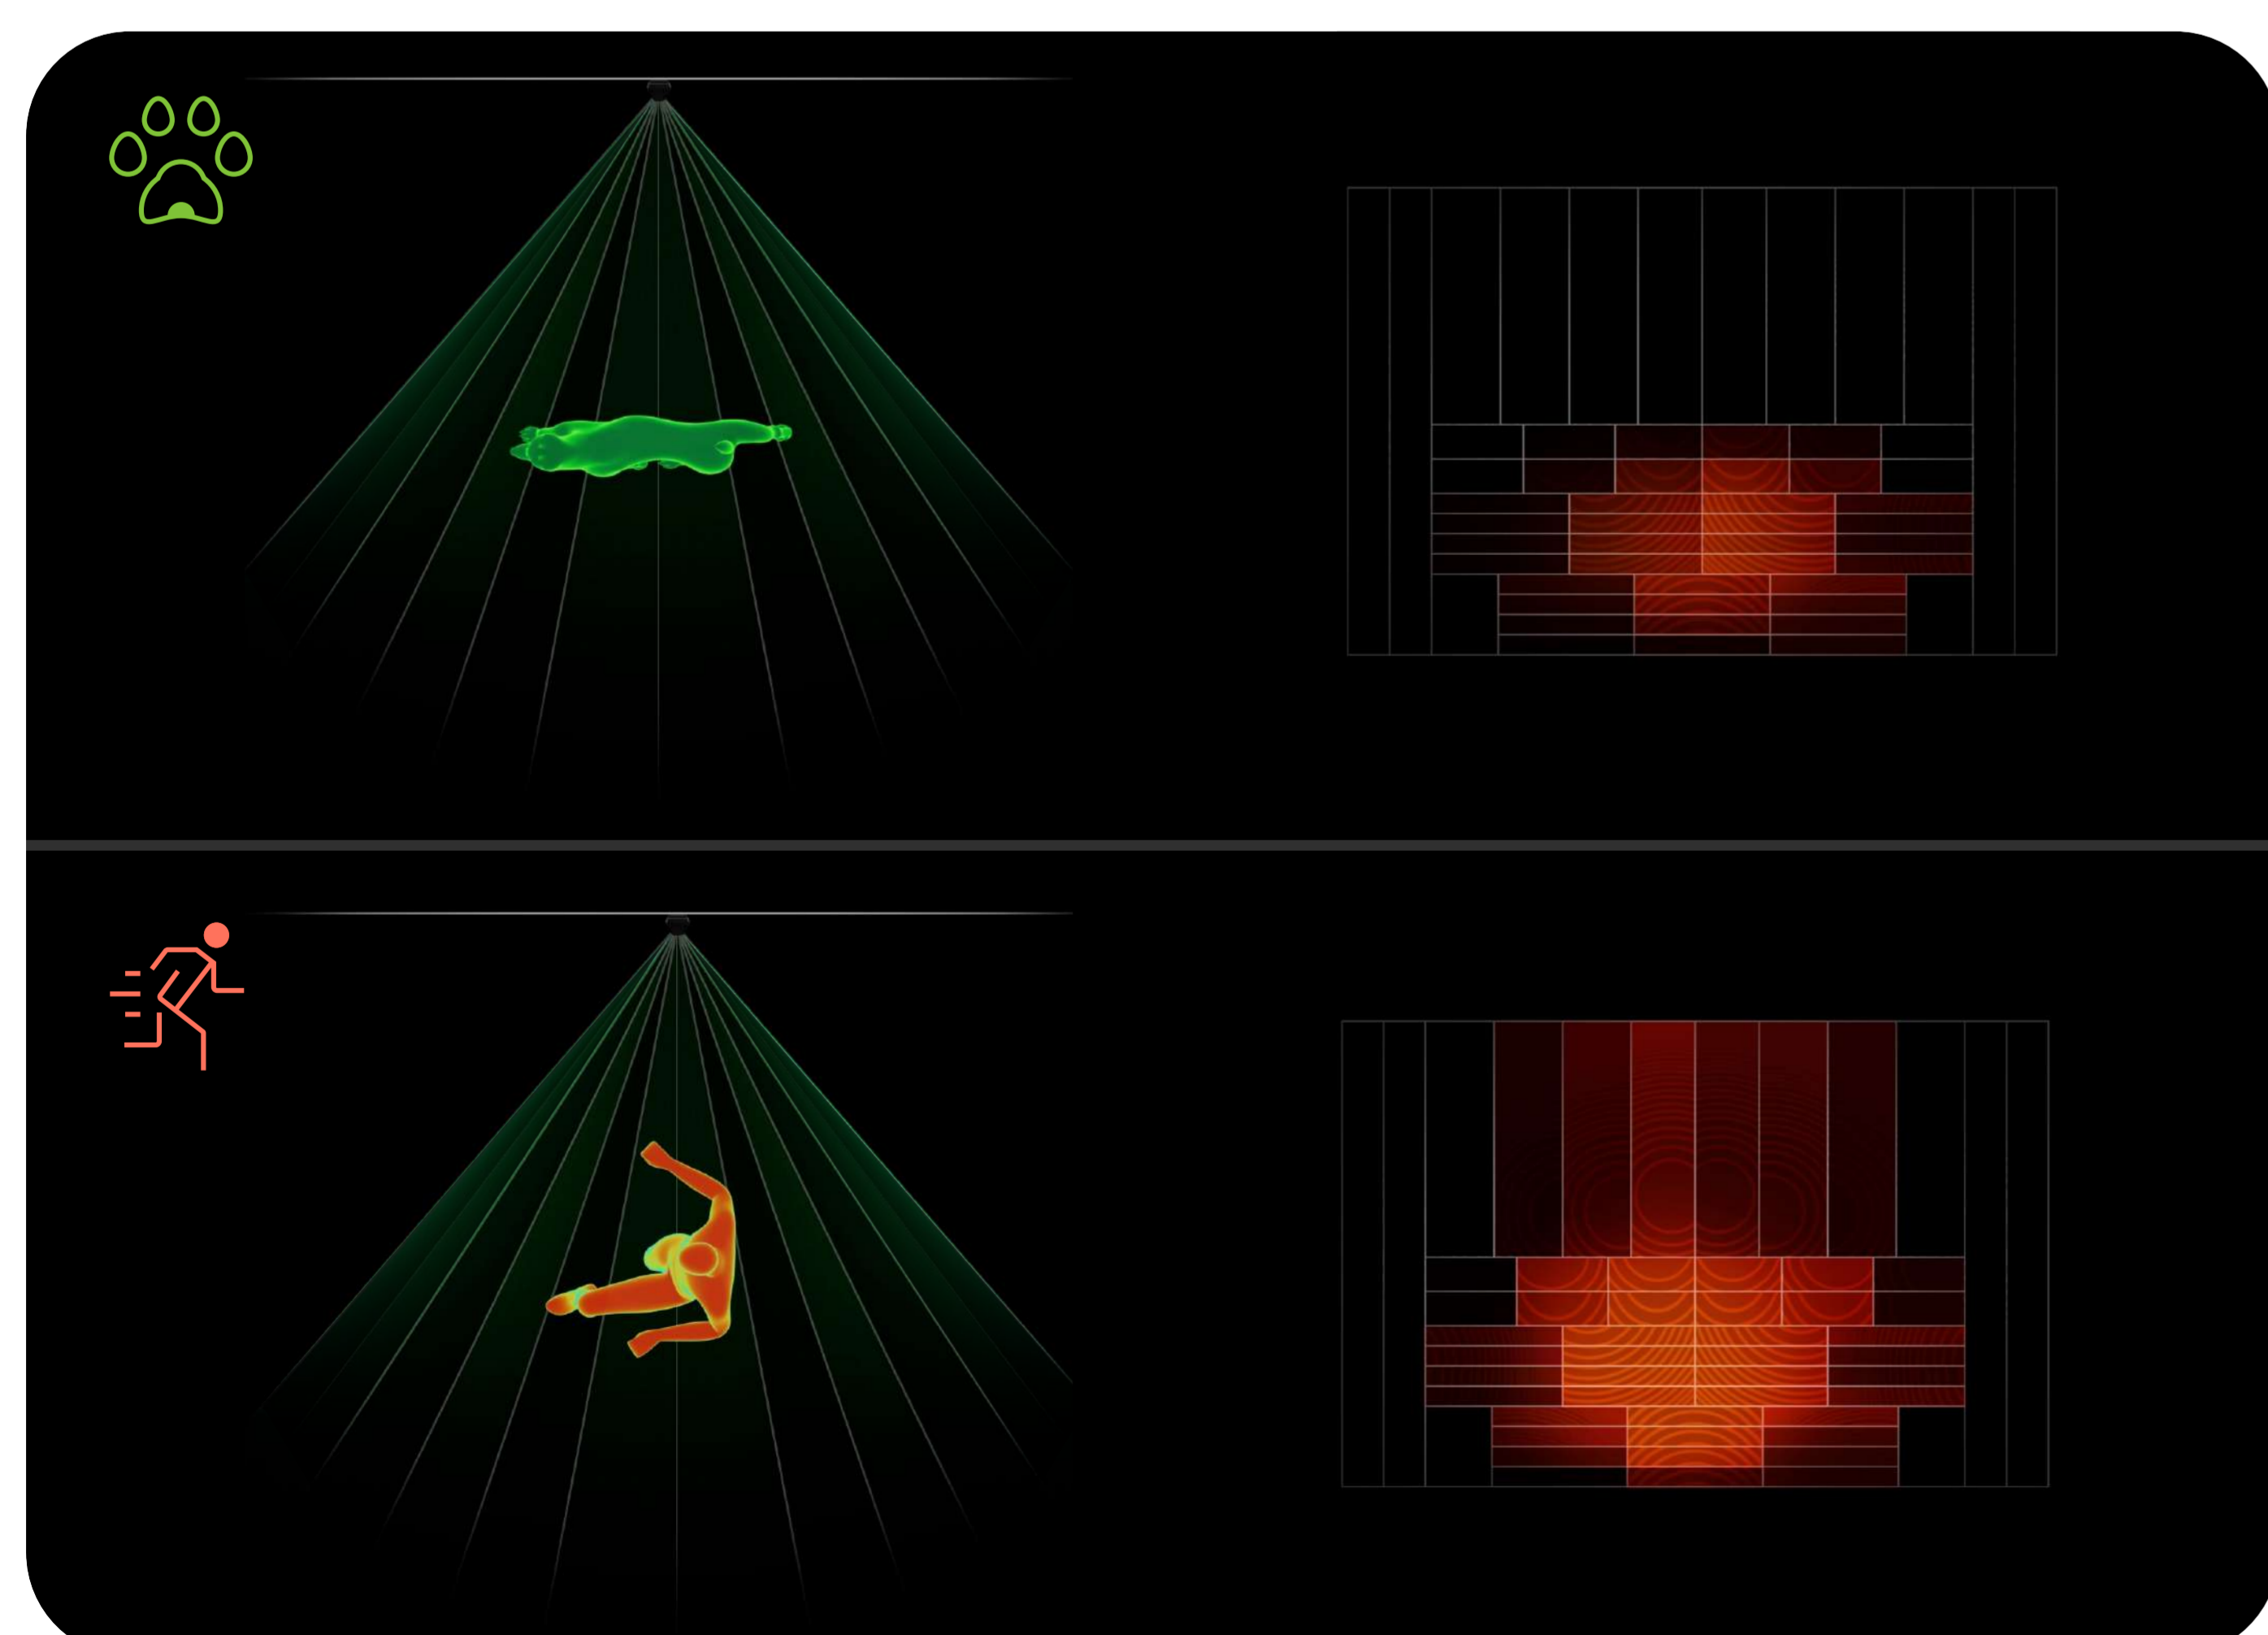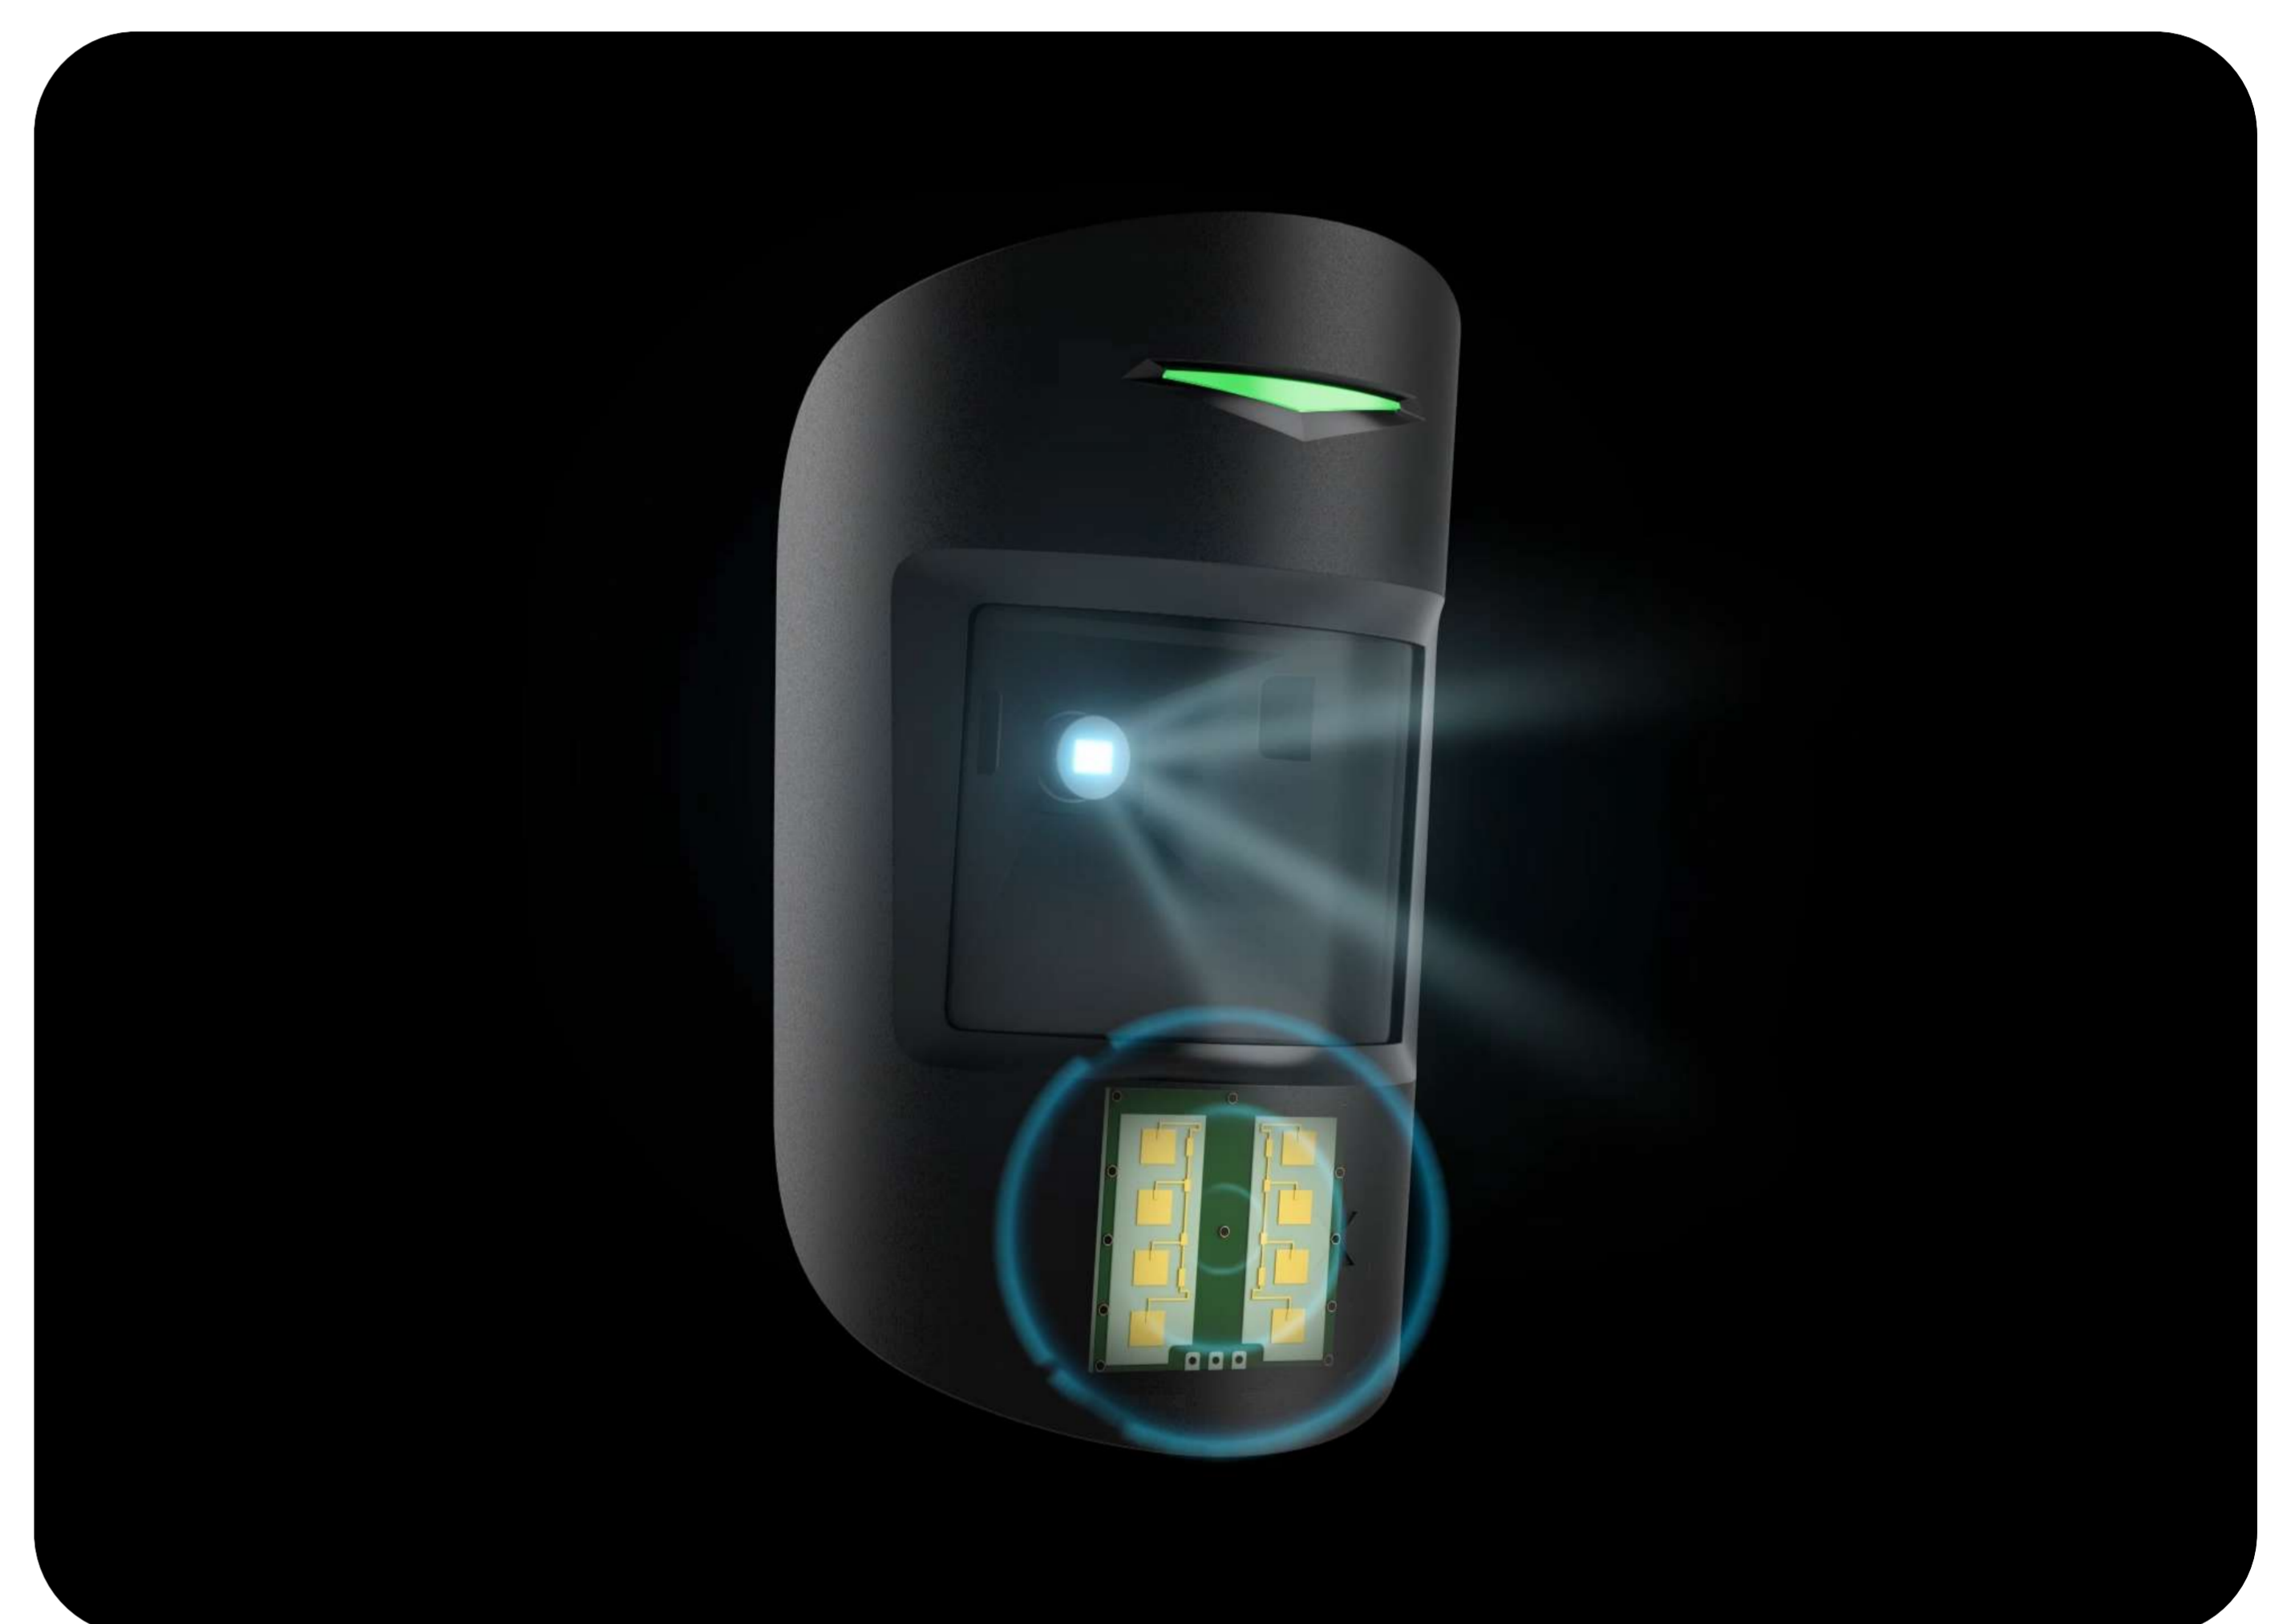

Software

For additional protection against false alarms, the detector uses the SmartDetect algorithm. The armed detector constantly analyses the thermal diagram received from sensors: the intensity of IR radiation, the size of the thermal spots, the speed of movement and other parameters.


Installation

When properly installed and configured, the detector does not react to common sources of false alarms and animals under 50 cm tall and 20 kg weight. For seamless installation, it has pre-installed Panasonic batteries and the SmartBracket mounting panel with a screw on the bottom. So, installers don't need to disassemble the detector and won't damage the electronics during installation.



Flawless autonomy

MotionProtect S Plus is entirely autonomous, as it works on the pre-installed Panasonic battery. The Panasonic company proves to be an expert and professional in batteries that can significantly enhance the devices' reliability and overall battery life operation. Thanks to that, the device works for up to 5 years. The app will notify the installer a few months before the battery is fully discharged, so you have time to change it.



Up to 5 years of battery life



Notifications on low battery


Encrypted two-way communication



Jeweller radio protocol provides fast and reliable two-way communication between the hub and devices. The protocol delivers instant data-rich alarms: security companies and users know which device was triggered when and where it happened.

Jeweller features **encryption** and **authentication** to prevent spoofing, and polling to monitor devices' statuses in real time. Supporting up to 1,200 m of wireless connectivity, Jeweller is ready to protect facilities and deliver the **best user experience** for both system owners and installers.

Quick installation and start-up

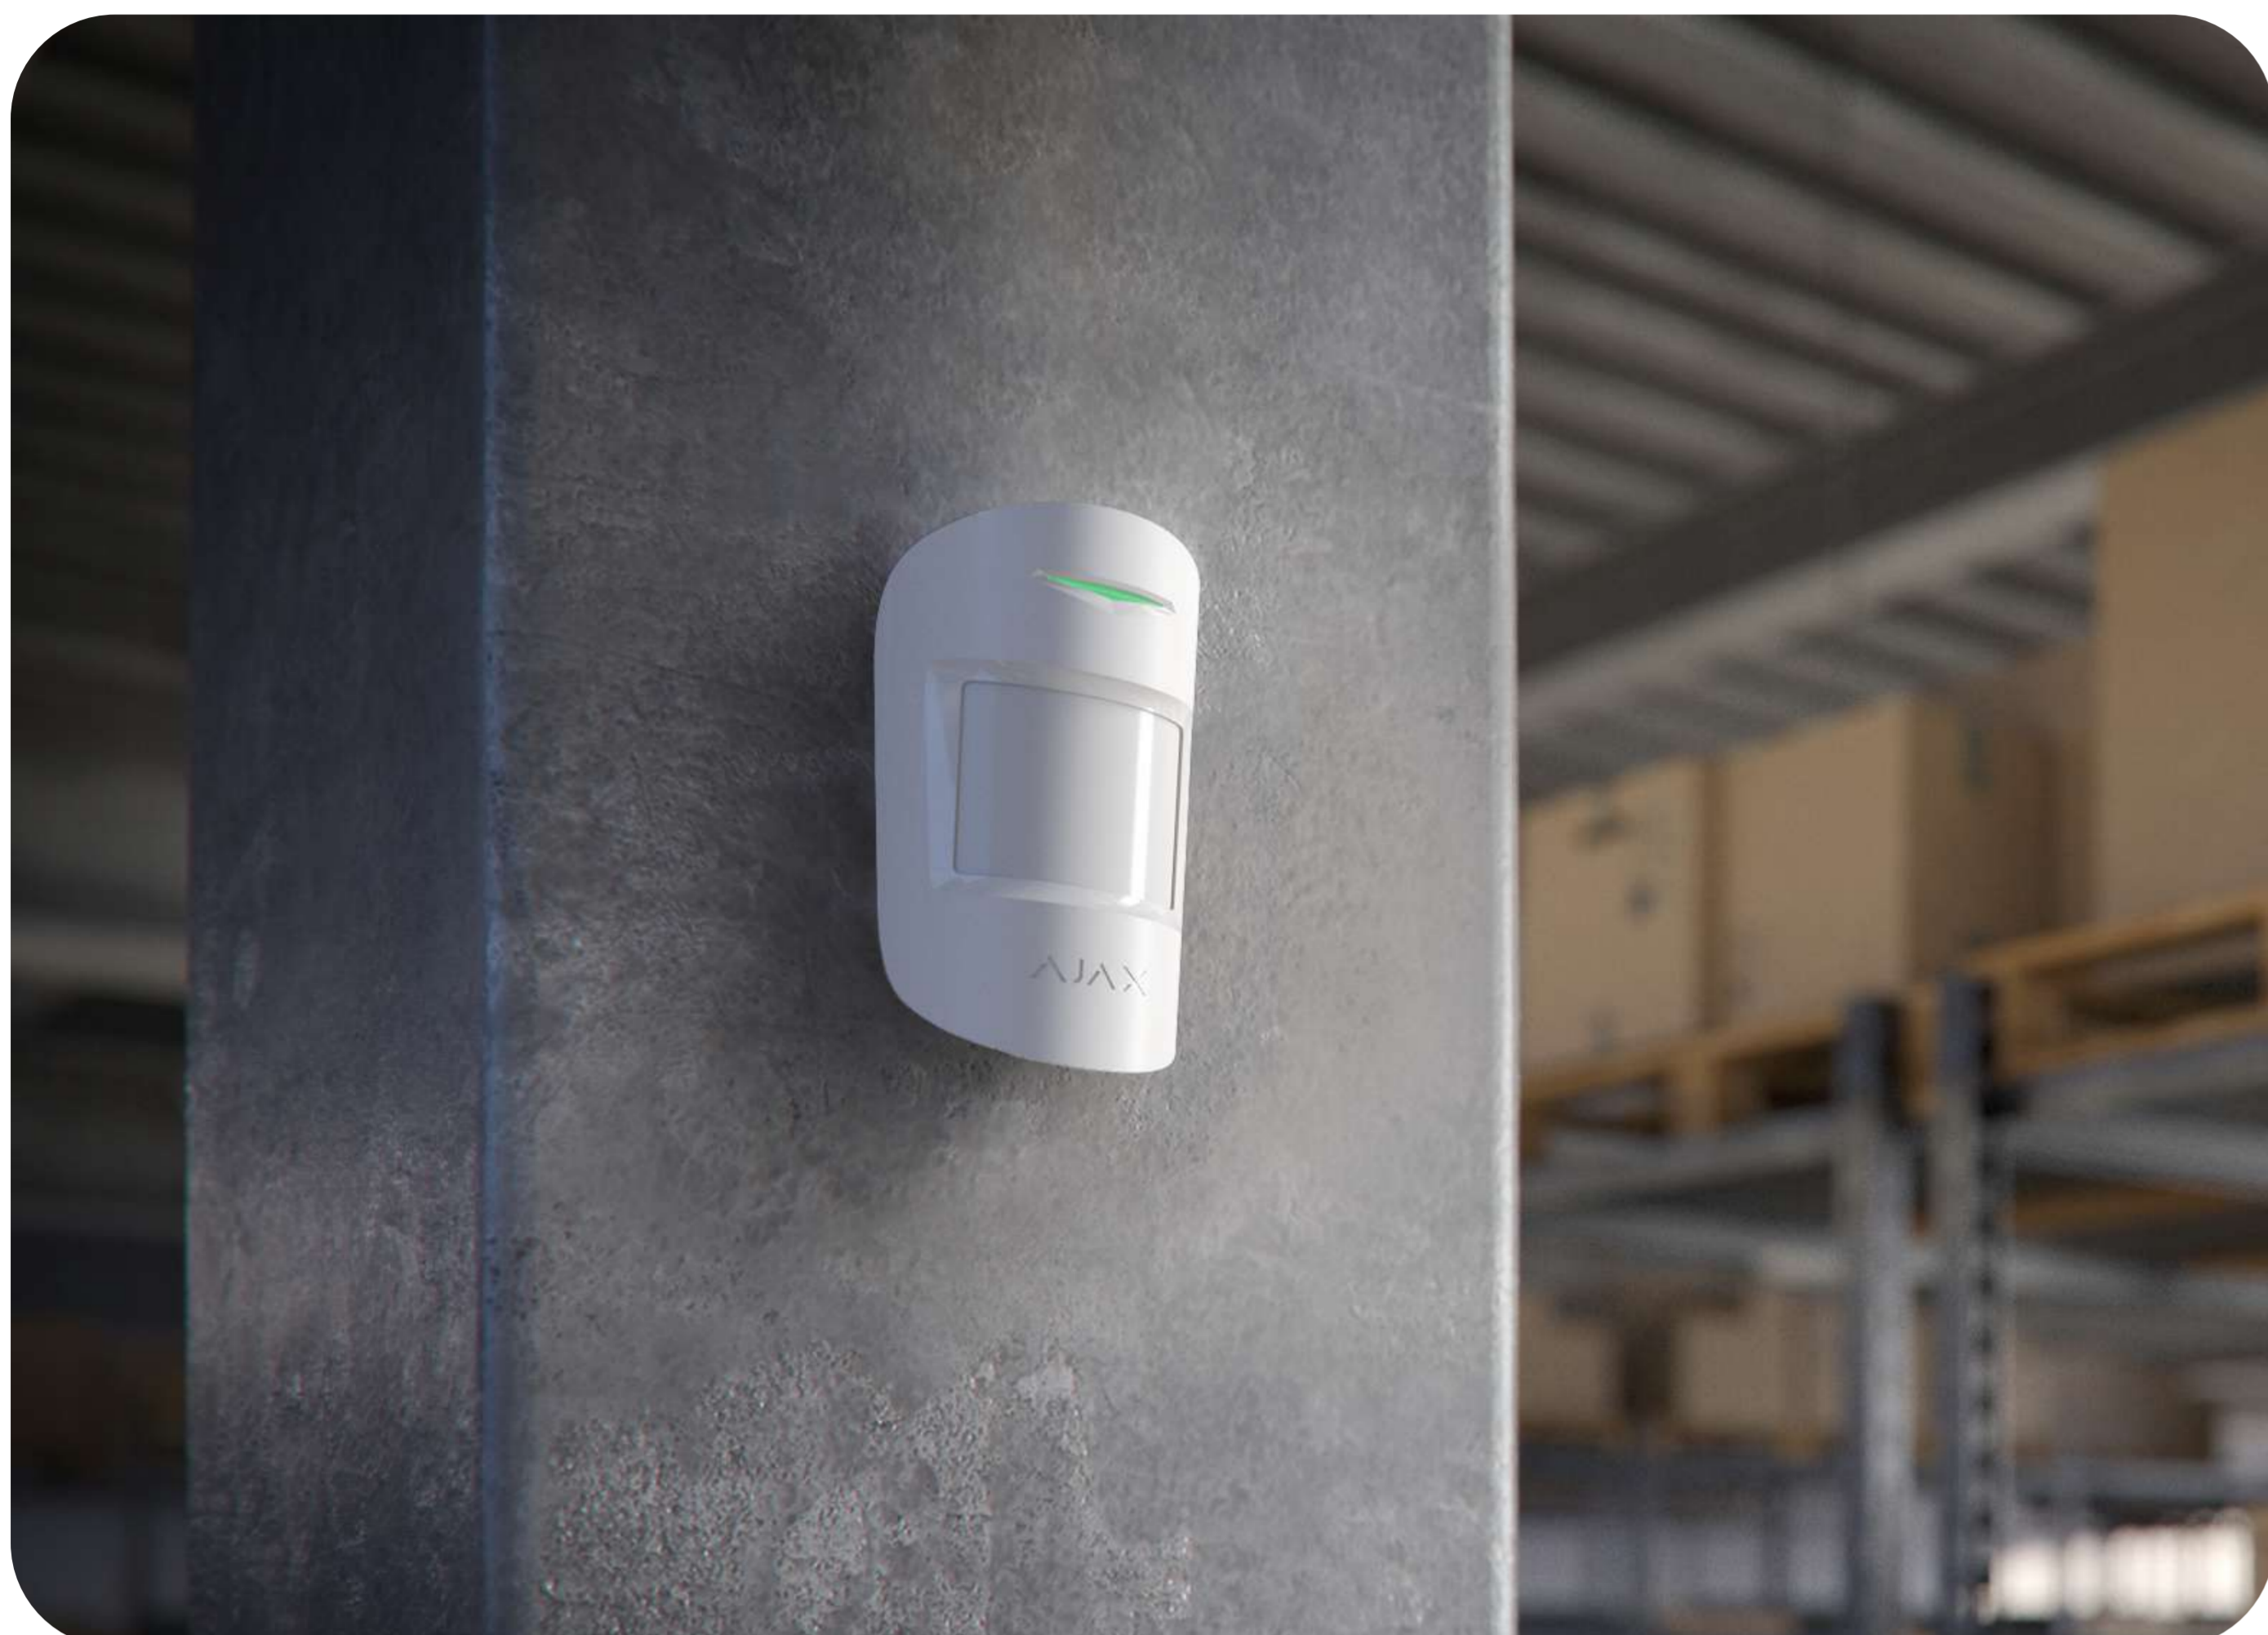

Easy to mount

Installing MotionProtect S Plus won't take much time. Using the SmartBracket panel, an installer can securely mount the device on the wall or in a corner without disassembling the detector's enclosure. An installer won't damage the hardware during installation, and the screw on the bottom of the device helps to make it safe.

Quick pairing process


To pair MotionProtect S Plus with the hub, scan the QR code or enter the device ID manually using the desktop or mobile PRO app. An installer only needs to name the detector and assign it to the room and security group.



Remote configuration

Intuitive Ajax apps provide remote set-up and all detector information from anywhere the Internet is available, on a smartphone or PC. The installer can remotely change the settings and provide services in time. No need to visit the facility.

Technical specifications

<p>Intended certifications</p> <p>EN 50131 (Grade 2) PD 6662:2017 INCERT NFA2P SSF</p>	<p>Compatibility</p> <p>Hubs Hub Plus Hub 2 (2G) Hub 2 (4G) Hub 2 Plus Hub Hybrid (2G) Hub Hybrid (4G)</p> <p>Range extenders ReX ReX 2</p>
<p>Communication with control panel</p> <p> Jeweller communication technology</p> <p>Frequency bands 866.0 – 866.5 MHz 868.0 – 868.6 MHz 868.7 – 869.2 MHz 905.0 – 926.5 MHz 915.85 – 926.5 MHz 921.0 – 922.0 MHz Depends on the sales region</p> <p>Maximum effective radiated power (ERP) ≤ 20 mW</p> <p>Communication range up to 1,200 m In an open space</p> <p>Polling interval 12–300 s Adjusted by PRO or user with admin rights in the Ajax app</p> <p>Protection against spoofing Device authentication</p>	<p>Motion detection</p> <p>Sensitive element 1 × PIR sensor 1 × K-band microwave sensor</p> <p>Detection distance up to 12 m¹ When installed at a height of 2.4 m</p> <p>Detection angles horizontal – 88.5° vertical – 80°</p> <p>Motion detection speed from 0.3 to 2.0 m/s The direction of the detector lens should be perpendicular to an alleged intrusion path into the facility</p> <p>Temperature compensation</p> <p>Sensitivity 3 levels Adjusted by PRO or user with admin rights in the Ajax app</p> <p>Pet immunity weight: up to 20 kg height: up to 50 cm</p>

1 – according to INCERT certification, detection range is up to 8 m

<p>Power supply</p> <p>Battery 1 x CR123A Pre-installed</p> <p>Battery life up to 5 years</p> <p>Manufacturer Panasonic</p>	<p>Installation</p> <p>Recommended installation height 2.4 m</p> <p>Operating temperature range from -10°C to +40°C</p> <p>Operating humidity up to 75%</p> <p>Protection class IP50</p>
<p>Enclosure</p> <p>Colour white black</p> <p>Dimensions 110 × 65 × 50 mm</p> <p>Weight 96 g</p> <p>Tamper alarm</p>	<p>Complete set</p> <p>MotionProtect S Plus Jeweller 1 x CR123A (pre-installed) SmartBracket Installation kit Quick start guide</p>