


DoorBell

Video doorbell with built-in AI, PIR sensor, and control via apps




Professional security at the front door

DoorBell is an outdoor device that combines the convenience of a smart doorbell with high-end security and video surveillance capabilities. When the doorbell's button is pressed, the user receives a notification, can view live video, and start a real-time conversation. Equipped with a PIR sensor and a wide-angle HDR camera powered by AI, the device detects people, animals, and vehicles and delivers excellent image quality. DoorBell also upholds Ajax's signature privacy features, seamless integration, and reliable backup options.

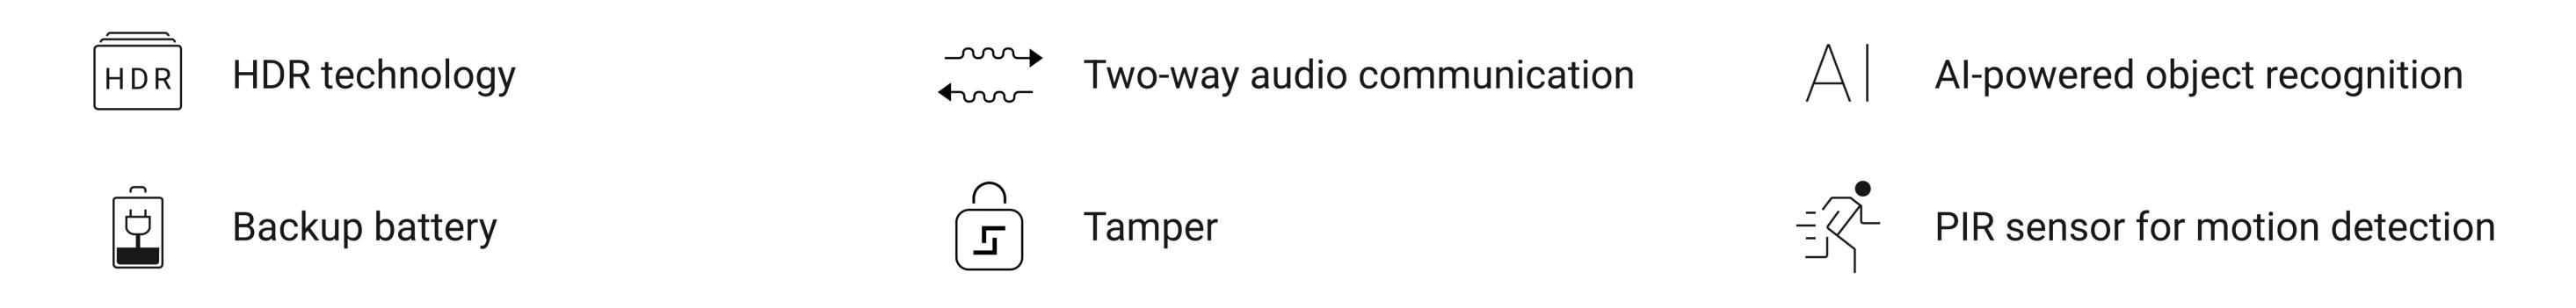


Three operation options

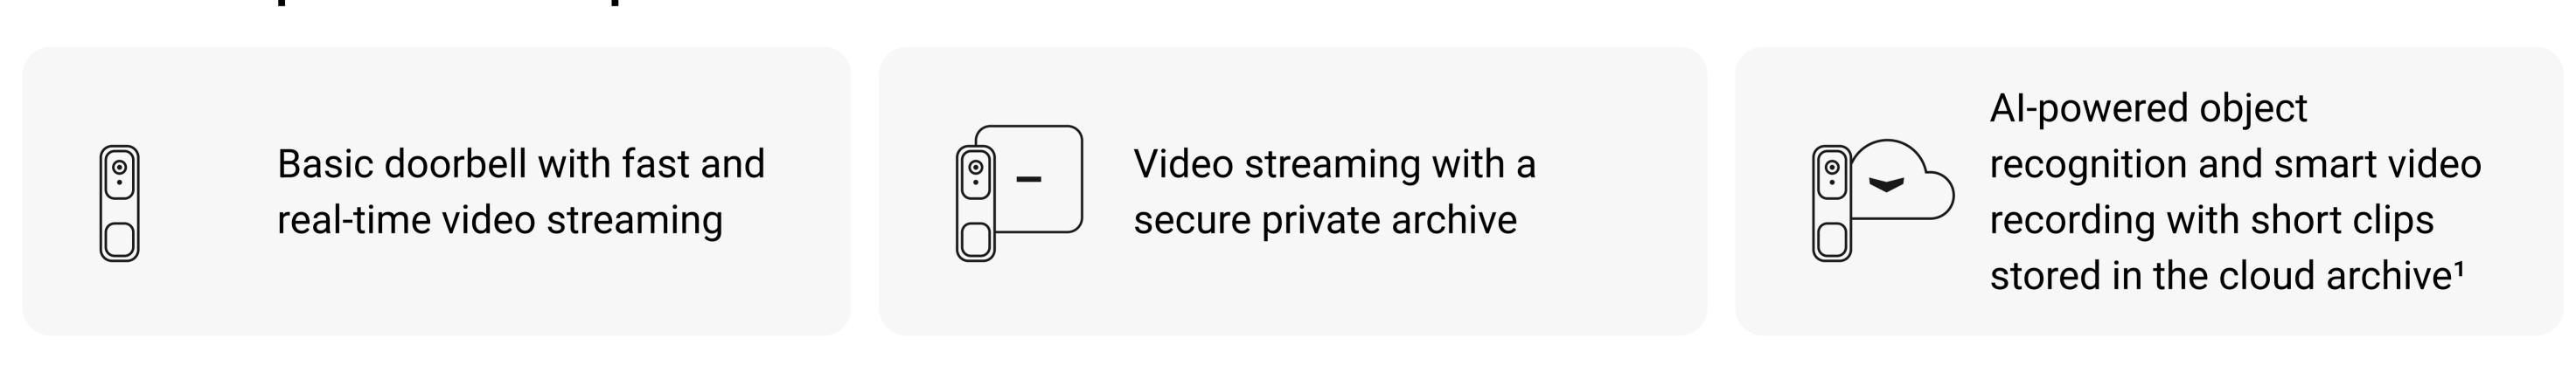

Reliable connection at all times

DoorBell uses Wi-Fi as its **primary communication channel**. The device is designed to amplify the signal and reduce radio interference, which ensures a more stable connection over greater distances.


Connecting DoorBell to an Ajax hub enables a **fallback communication channel**. This feature allows the device to continue transmitting events, alarms, and photos through the secure proprietary Jeweller and Wings radio protocols, even if the Wi-Fi connection is lost.

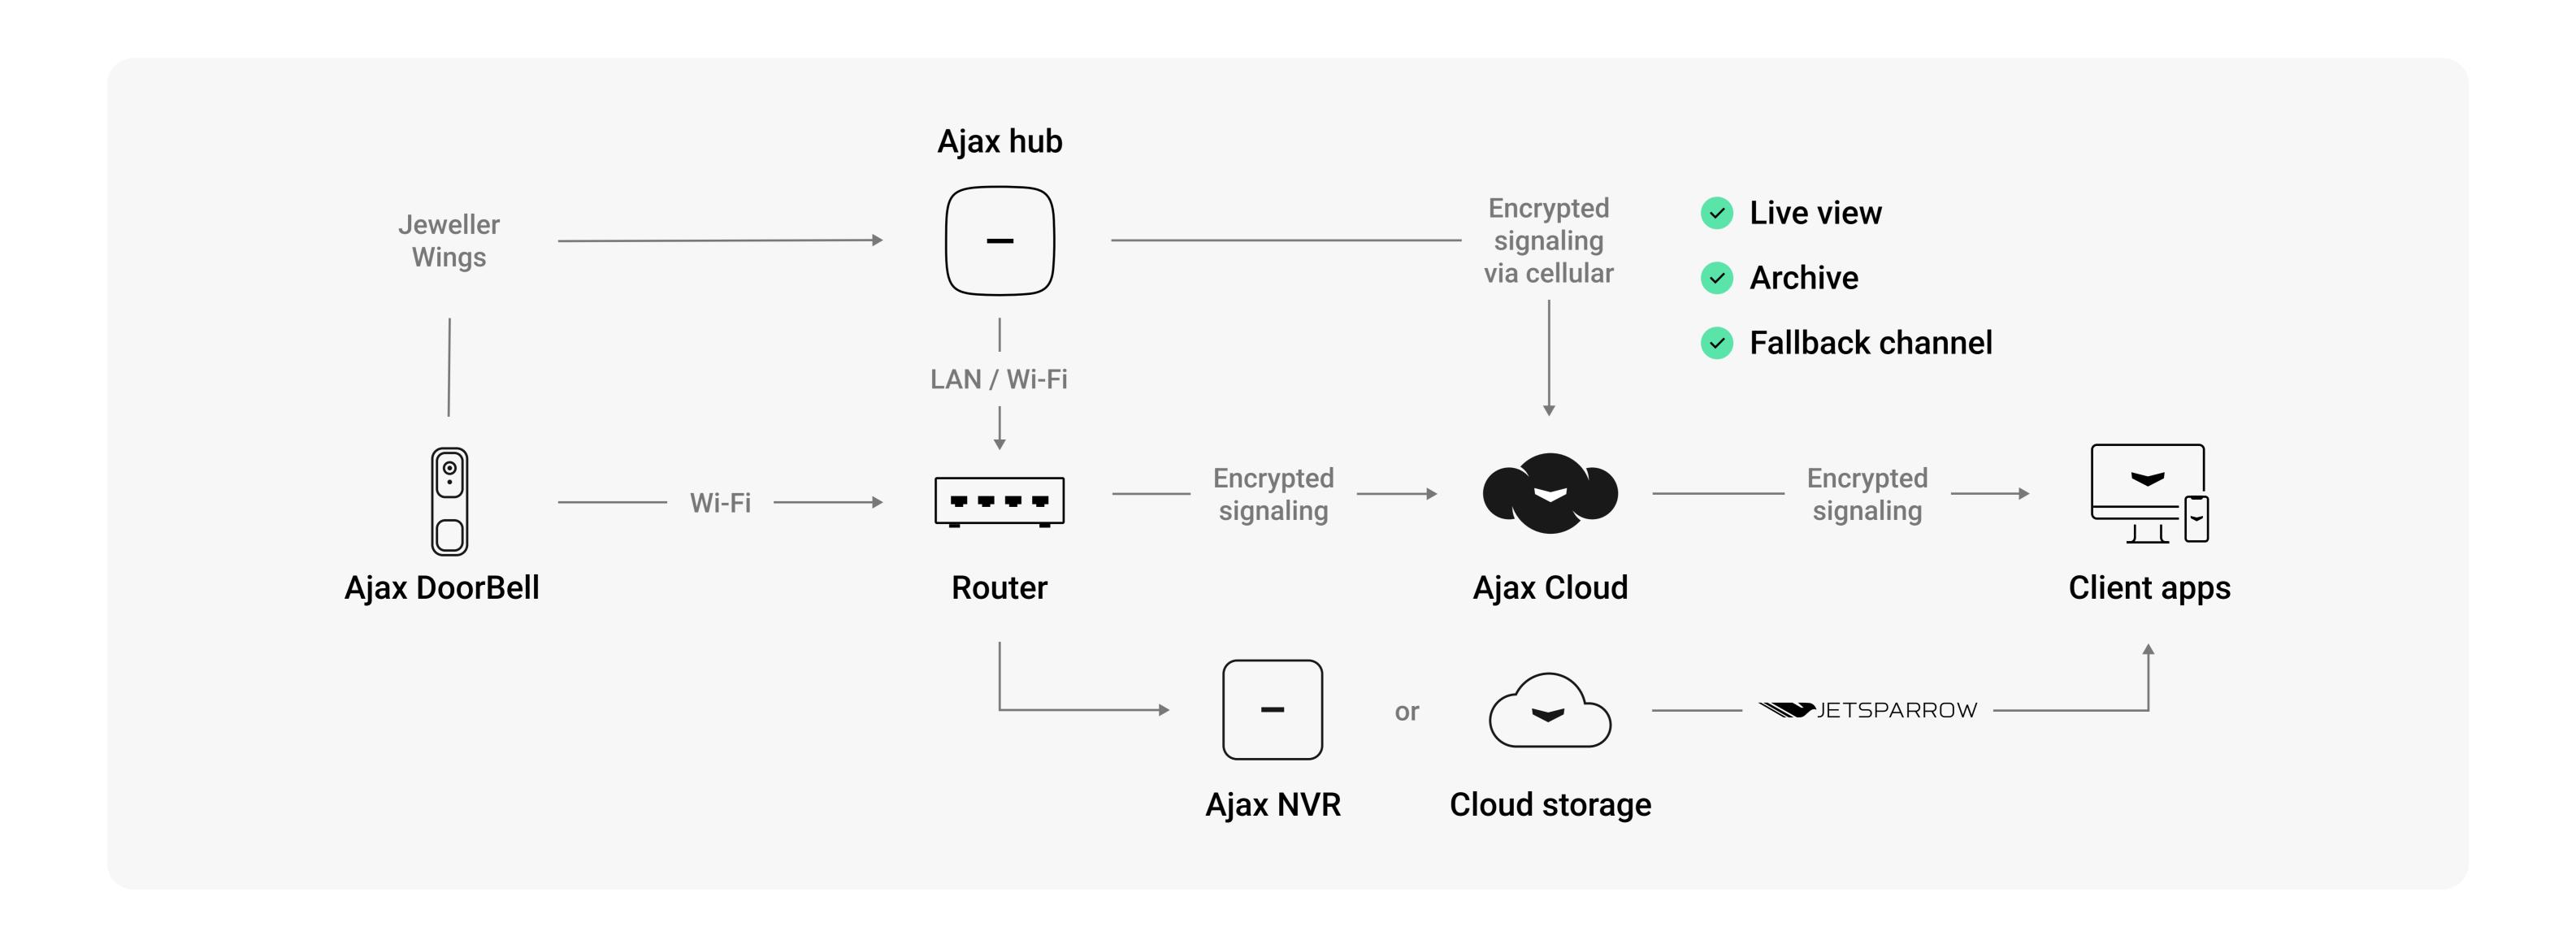



Advanced video experience

- Al-powered recognition of people, animals, and vehicles
- Smooth streaming and archive navigation thanks to the JetSparrow technology
- Wide-angle HDR camera for high-quality images
- IR illumination of up to 6 m (20 ft) for enhanced visibility in the dark



Quality two-way audio communication

- Clear voice transmission with noise suppression
- Echo cancellation for better audibility
- Top-notch audio quality thanks to the G.722 codec



Uncompromised security

- Fallback wireless communication with a hub at a distance² of up to 1,700 m (5,550 ft)
- Built-in backup battery
- Tamper alarm to notify of device dismantling
- Secure passwordless authentication



Easy installation and setup

- Pairing with a hub by scanning the QR code
- Remote control and configuration via Ajax apps
- SmartBracket mounting panel for installation without disassembling the device enclosure
- BellKit bypass to connect DoorBell to a wired chime

Compatibility

Hubs

Hub 2 (2G) Jeweller Hub 2 (4G) Jeweller Hub 2 Plus Jeweller Hub Hybrid (2G) Hub Hybrid (4G) Hub BP Jeweller

Range extenders

ReX 2

Video recorders

NVR (8-ch) NVR (16-ch)

Video recording

Camera

4 MP CMOS sensor

Resolution

up to 2560 × 1440 px

Camera viewing angles

horizontal: 155° vertical: 90°

Video protocol

JetSparrow

Video codec

H.264

Dynamic range

HDR

Communication

Jeweller and Wings radio communication technologies

Communication range

up to 1,700 m up to 5,550 ft In an open space

Frequency bands

866.0-866.5 MHz 868.0-868.6 MHz 868.7-869.2 MHz 905.0-926.5 MHz 915.85-926.5 MHz 921.0-922.0 MHz

Depends on the sales region

Wi-Fi

2.4GHz, up to 2 Mbit/s

Sound

Output speaker power

1.5 W

Speaker volume

85 dB

Features

Two-way communication

Motion detection

up to 4 m up to 13 ft Using a PIR sensor

Audio processing

Always active noise suppression and echo cancellation

Power supply

Main DC voltage range

12-24 V==

Main AC voltage range 16-24 V~, 50/60 Hz

Battery

built-in rechargeable battery:

Li-ion 600 mAh

Enclosure

Color

black, white, grey, graphite

Dimensions

 $145 \times 47 \times 34 \text{ mm}$ $5.71" \times 1.85" \times 1.34"$

Weight

163 g 5.75 oz

Installation

Operating temperature range

from -25 °C to +60 °C from -13 °F to 140 °F

Operating humidity

up to 90%

Protection class

IP54

Installation height

1.2-1.5 m 4-5 ft

Complete set

DoorBell

SmartBracket mounting panel

Wedge bracket (2 pcs)

BellKit

Installation kit

Quick start guide

¹ This feature will be available in upcoming updates.

² In an open space.











