

DS-XS6606/09/12-S/B
Wall Mounted Cabinet



- The enclosures conform to 19-inch mounting standards, are compatible with ETSI standard equipment installations, and are designed for rack-mounted equipment in cabling, telecom, IT, industrial, and home.

▪ Specification

Model		DS-XS6606-S/B	DS-XS6609-S/B	DS-XS6612-S/B
Specifications	Installation Method	Wall-mounted		
	Internal Space	6U	9U	12U
	Static Load Capacity	60KG		
	Dimensions (W*D*H) mm	600*600*370mm	600*600*500mm	600*600*635mm
	Net Weight	19.5KG	23KG	26KG
Parameters	Opening Percentage (Front Door)	78%		
	Opening Percentage (Rear Door)	0		
	Front Door	4mm Glass door,1mm SPCC		
	Front and Rear Frame	1.2mm SPCC		
	Side Panel	1.0mm SPCC		
	Beam	1.2mm SPCC		
	Top Cover	1.0mm SPCC		
	Bottom panel	1.0mm SPCC		
	Vertical rail	1.5mm SPCC		
	Rear panel	1.0mm SPCC		
	Mounting bracket	1.2mm SPCC		
Others	Shelf	Optional		
	FAN	Optional		
	PDU	Optional		


▪ Available Model

DS-XS6606-S/B(Overseas)

DS-XS6609-S/B(Overseas)

DS-XS6612-S/B(Overseas)

▪ Dimension

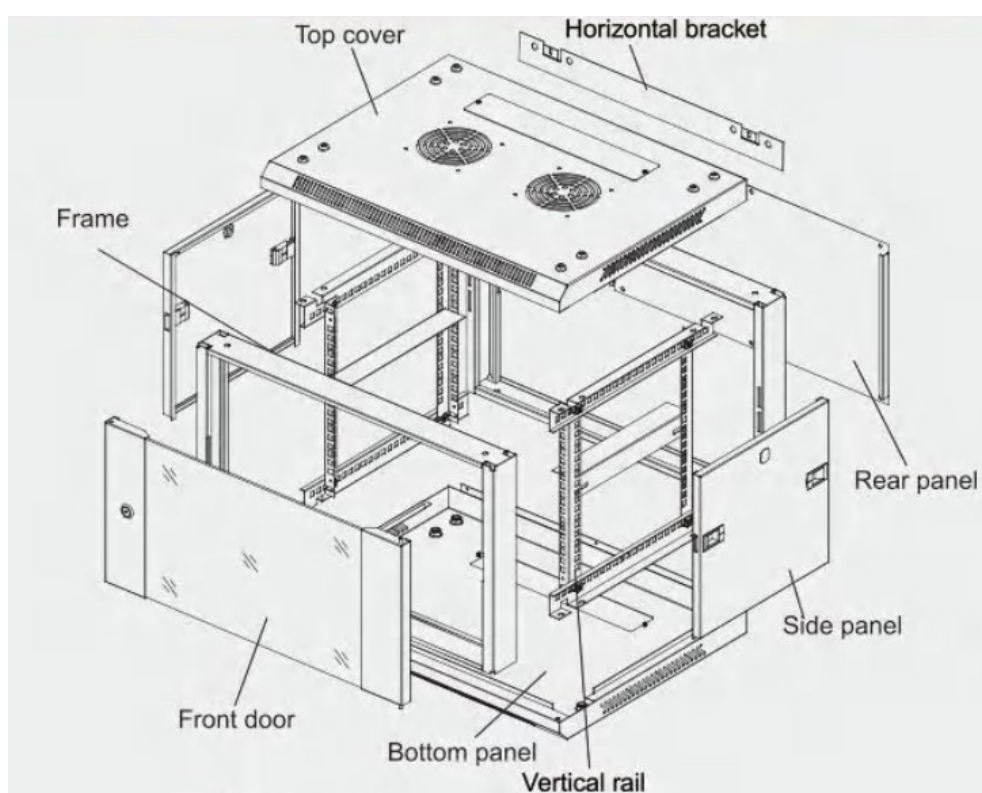

See Far, Go Further



www.hikvision.com
support@hikvision.com

